


ข้อกำหนดและมาตรฐานทั่วไป

งานติดตั้งไฟฟ้าและสิ่งส่วนบุคคลทางหลวง

(GENERAL SPECIFICATION)

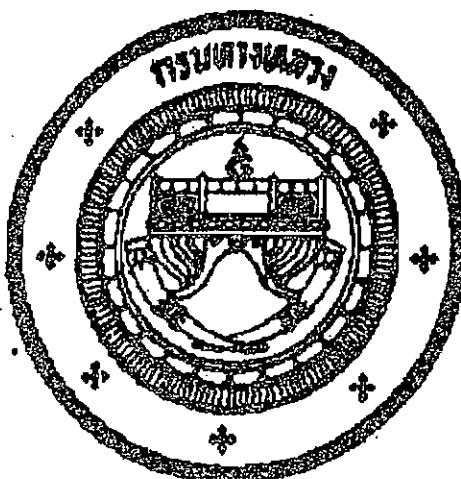

กรมทางหลวง
มกราคม 2522

กระทรวงคมนาคม

ກໍາສົງກວນຫານອງ

4 u.1/62/2521

ตามก้าส์งกอนหาราชบูรณะที่ บ. ๑/๖๑/๒๕๒๑ ลงวันที่ ๙ พฤษภาคม ๒๕๒๑
เรื่อง แห่งกังหันจะต้องการก่อหนี้ยกเว้นได้ ให้ทั้งหมดห้ามและให้ที่กฎหมายราชบูรณะ
เพื่อชำระใบอนุญาตประกอบการ ดังนี้ นายรศิษฐ์ คงคา ผู้ก่อหนี้เจ้าของรายชื่อใบอนุญาต
เป็นการค้าร้านในเขตกรุงเทพมหานคร ก่อหนี้ครบกำหนด.

สัปดาห์ที่ 27 พุธที่ 10 กันยายน 2521

ເນັດຍາ ວິຊາກຫຼາກ

(ນາມເຊື່ອ ສັງເກດ)

三

๗๖๘

卷之三

ପାତ୍ରମାନଙ୍କ ଶବ୍ଦିକାରୀ

พิมพ์ครั้งที่ ๒

مکانیزم

ກ່າວສົ່ງຄະນະພາບຮາດ

ที่ บ.1/61/2521

๔๗๙ นาทีงี้จะขอเรียกการค้าขายมากรุวนว่าเป็นห้าแสงสว่างและไฟฟ้าขุ่นมากระดับ

เพื่อประโยชน์แก่ราชการ จึงให้แต่งตั้งคณะกรรมการดำเนินการดูแลเรื่องนี้ให้สำเร็จและให้ผลสูงมากที่สุด ซึ่งมีระดับกับรายได้ราชการ ทั้งฝ่ายบ้าน ก่อตั้งในปี

1. บุตรสาวการคุยเรื่องราวด้วยความดี เป็นประชานกรรมการ
 2. นายเดนก มีชาติที่ว่ารวม ทำแผนที่นาที่ทางไปมา 6 เป็นกองนักการ
 3. นายมีชุมชา ภูเขาบุพง ทำแผนที่นาที่ทางไปมา 6 เป็นกองนักการ
 4. นายมีสุขชา แซนเดนด์ ทำแผนที่นาที่ทางไปมา 6 เป็นกองนักการ
 5. นายวงศ์ษัช ใจดีสุวรรณ์ ทำแผนที่นาที่ทางไปมา 5 เป็นกองนักการ
 ทั้งนี้ ทั้งหมดทั้งนี้ เป็นหน้าใน

សំណើនាម ៩ ខែមីករា ២៥២១

ເລື່ອມຕົວ ວິຊາຮຸກກໍາ

(นายจอมสีดา จิตราภรณ์).

卷之三

ស៊ានេរុករាយ

卷之三

Digitized by Google

תְּמִימָנָה / תְּמִימָנָה

CONTENTS

	PAGE
1 General	1
1.1 Description	1
1.2 Responsibility for Design and Materials	1
1.3 Compliance with Manufacture's Specifications	2
1.4 Maintenance Period	2
1.5 Electricity Supply	2
1.6 Definitions	3
2 Materials and Equipment	5
2.1 Lanterns	5
2.2 Wiring and Switching	8
2.3 Columns and Brackets	9
2.4 High Mast Lighting	10
2.5 Protection Against Corrosion	13
2.5.1 Painting	13
2.5.2 Galvanizing	13
3. Construction Methods	14
3.1 Excavation and Reinstatement	14
3.2 Concrete Work	14
3.3 Conduits, Fittings and Boxes	15
3.4 Pull boxes or Junction Boxes	16
3.5 Testing	16
4. Measurement	18
5. Payment	19
6. Information to be Supplied by Bidder	19

7. Other details	20
8. ข้อแนะนำในการติดตั้งอุปกรณ์ไฟฟ้าและส่วนราชการฯ ของ การไฟฟ้าแครหดวง	21-29
9. ความรับผิดชอบของผู้ว่าจ้างต่อสาธารณะปีก	29
10. ความรับผิดชอบของผู้ว่าจ้างในช่วงการบำบัดรักษา (เพิ่มเติมข้อ 1.4)	30

GENERAL SPECIFICATION FOR STREET LIGHTING

1. General

1.1 Description

This work shall consist of the supply of all lanterns complete, brackets, columns and other supporting devices, bases, cables, switchgear and all necessary ancillary equipment together with the transportation, storage, assembly, erection, connection and testing of the same in order to supply a complete street lighting system in accordance with the details shown on the plans and as specified herein and in the Special Provisions if any. Design of the system shall be included.

1.2 Responsibility for Design and Materials

The Contractor shall be solely responsible for the adequate design and the co-ordinated functioning of all goods and construction furnished under this contract. All the component parts shall be designed so as to ensure their proper co-ordinated functioning and operation. All equipment shall be of the maker's standard models and shall include all recent improvements in design and materials. All materials used in manufacture and construction shall be of high quality and fully in accordance with the best modern practice.

The equipment offered and the work done shall be suitable for continued trouble-free operation under adverse climatic conditions of heavy rain, high humidity and intense sunlight. The equipment must be able to withstand over long periods ambient air temperatures varying from a normal of 4° C to a maximum of 50° C.

All materials used in the manufacture and construction shall be free from defects and shall be made having proper regard for safety and in strict accordance with all the relevant requirements and regulations of the Electricity Supply Authority.

1.3 Compliance with Manufacture's Specifications

The Contractor shall ensure that the equipment and parts used will be entirely suitable for the work to be performed and that they will be manufactured to proper clearances and fit. He shall further ensure that the loading of equipment will under all normal circumstances not exceed the maximum laid down or agreed in writing by the manufacturer.

The Contractor shall be responsible for the inspection of all equipment and parts before their incorporation in the works to ensure that they comply with the conditions of the contract and that they are not defective in any way as regards materials or workmanship should any such non-compliance or defects be found during the inspection, the Contractor shall correct, or cause to be corrected such non-compliance and defects, all at the Contractor's expense and to the satisfaction of the Engineer.

1.4 Maintenance Period

All repairs and replacements required during the Maintenance Period shall be carried out with despatch and an adequate supply of spares shall be available for this purpose. (See also clause 10)

1.5 Electricity Supply

The Contractor shall carry out negotiations with the Electricity Supply Authority concerned on behalf of the Department of Highways for permanent electricity supply to the installation, and any costs associated with obtaining this supply shall be included in the contract rates. The Contractor must ensure that the equipment supplied will function correctly at the supply voltage, and must allow for normal variations and surges.

1.6 Definitions

Unless specifically defined herein, definitions shall be as given in British Standard 892 : 1967 "Glossary of Highway Engineering Terms" and in British Standard Code of Practice CP 1004 "Street Lighting", both as amended at the time of Tender.

- a) Lantern. A housing for one or more lamps comprising the body and any refractor, reflector, diffuser or enclosure associated with the lamp or lamps.
- b) Outreach. The distance measured horizontally between the centre of a lantern mounted on a bracket and the centre of the column or wall face.
- c) Overhang. The distance measured horizontally between the centre of a lantern and the adjacent edge of the pavement.
- d) Mounting Height The vertical distance between the centre of the lantern and the surface of the pavement.
- e) Spacing. The distance, measured parallel to the centre line of the road, between successive lanterns. In a staggered arrangement, this distance is measured parallel to the centre line from the centre of a lantern on one side of the road to the centre of the next lantern on the opposite side.
- f) Beam. That portion of the light output of the lantern contained by the solid angle subtended at the effective light centre of the lantern containing the maximum intensity but no intensity less than 90 % of the maximum intensity.
- g) Luminous Flux. The light given by a light source of lantern or received by a surface, irrespective of the direction in which it is distributed.
The unit of luminous Flux is the Lumen (LM).

- h) Lower Hemispherical Flux or Downward Flux. The luminous Flux emitted by a lantern in all directions below the horizontal.
- i) Peak Intensity Ratio. The ratio of the maximum intensity to the mean hemispherical intensity of the light emitted below the horizontal.
- j) Mean Hemispherical Intensity. The downward flux divided by 6.28. (This is the average intensity in the lower hemisphere).
- k) Intensity Ratio. The ratio of the actual intensity in any direction of a lantern to the mean hemispherical intensity.
- l) Luminous Intensity. The light giving power of a lantern in any particular direction. The unit of luminous intensity is the Candela (cd). Beam Center, Isocandela Curve, Isocandela diagram, Polar Curve.
- m) Beam center. A direction midway between the directions for which the intensity is 90 percent of the maximum in a vertical plane through the maximum and on a conical surface through the maximum.
- n) Isocandela curve. A curve traced on an imaginary sphere with the source at its center and joining all the points corresponding to those directions in which the luminous intensity is the same, or a plane projection of this curve.
- o) Isocandela diagram. An array of isocandela curves.
- p) Polar Curve. Curve of light distribution using polar co-ordinates.

2. Materials and Equipment

2.1 Lanterns

The supplier must submit the guaranteed letter of these. Body of luminaire shall be non-corrosive light alloy metal, colour if applied shall be stove enamelled finish in gray or aluminum shade.

Reflector, if used, shall be mirror type and made of anodized aluminum sheet. Gasket shall be applied on every part where insect is expected to enter into lamp compartment including that at slipfitter collar. The gasket used shall be non-aging and heat-resistant type, transverse and longitude cross-section drawing of the luminaire scaled 1:1 shall be furnished with the quotation.

Refractor (enclosing bowl) if made of the transparent acrylic will not produce less output due to colour changing within first 5 years of service.

- a) Lanterns shall be of the cut-off or the semi-cut-off type as shown on the Drawings or as specified in the Special Provisions. Non-cut-off lanterns shall not be used.
- b) Unless otherwise specified, the mounting height shall be not less than 7.5 meters (or 25'0") nor more than 12 meters (or 40'0").
- c) Where there is no speed limit on the road or where there is a speed limit of more than 60 kilometers per hour the minimum clearance between columns and the edge of the pavement shall normally be 1.6 meters but where this is not reasonably attainable, such as bridge locations and other restricted areas the minimum clearance may with the previous permission of the engineer be reduced to 1.0 meter.

Where there is a speed limit of less than 60 kilometers per hour the minimum clearance between columns and the edge of the pavement should be 1.5 meters but this may be reduced to

0.50 meter for crossfalls of not more than 1 in 40 towards the curb

0.60 meter for crossfalls of between 1 in 40 and 1 in 24 towards the curb

0.75 meter for crossfalls of more than 1 in 24 towards curb with the previous permission of the Engineer

d) Each lantern should normally direct two beams along the length of the road. The polar curves of the lanterns in both horizontal and vertical planes should be smooth and free from any abrupt variations so that the luminous intensity diminishes smoothly and progressively from its maximum. For centrally mounted lanterns the beams should be approximately axial; for lanterns mounted at the sides of the roadway, the maximum toe-in of the beam will be 15°. Adequate but not excessive light should be directed towards the curbs and outer edge of the road. Where area illumination is required using high mast lighting, these provisions shall not necessarily apply.

e) For cut-off lanterns, the beam should be in a direction about 65° from the downward vertical. The peak intensity ratio shall be between 2.0 and 4.0; the intensity ratio in the zone 0° to 30° below a horizontal plane through the lantern shall be between 0.3 and 2.0. An intensity ratio of 1.2 shall lie between elevations of 72° and 78° from the downward vertical in the vertical plane parallel to the axis of the roadway and the horizontal intensity ratio in the same plane shall be not greater than 0.15.

f) In the case of semi-cut-off lanterns, the beam should lie in a direction about 75° from the downward vertical. The peak intensity ratio shall be between 1.8 and 4.0. The intensity ratio in the 0° to 30° zone below a horizontal plane through the lantern shall be between 0.3 and 1.7. An intensity ratio of 1.2 shall lie between elevations of 78° and 84° from the downward vertical in the vertical plane parallel to the axis of the roadway and the horizontal intensity ratio in the same plane shall be not greater than 0.6 except that in the case of sodium lamps, the intensity ratio of 1.2 shall lie similarly between 80° and 86° and the horizontal intensity ratio in the same plane shall not exceed 0.7.

g) The siting of lanterns shall be in accordance with the following table which gives minimum required illumination. Particular care shall be taken with the siting of lanterns on bends and summit vertical curves. At junctions and roundabouts, lantern spacing shall be designed so as to give at least the minimum illumination required by the following tables and also lanterns shall be spaced and sited, where possible, so as to delineate the course of the roadway plainly to road user approaching from any normal direction without any possible misleading impressions.

The level of illumination provided at road junctions and roundabouts shall be at least as high as that on any of the approach roads and in the case of roundabouts, a minimum level of illumination at any curb line of 10 lumens per square meter shall be provided.

**Required minimum Average Horizontal Illumination
in lumens per Square Meter (Lumens per Square Foot)**

	Central-Urban		Sub-Urban		Rural	
	Areas	Areas	Areas	Areas	Areas	Areas
High Grade Motorways	21.5	(2.0)	15.0	(1.4)	10.75	(1.0)
At Junctions	21.5	(2.0)	21.5	(2.0)	15.0	(1.4)
Main Routes	21.5	(2.0)	13.0	(1.2)	9.7	(0.9)
Secondary Routes	13.0	(1.2)	9.7	(0.9)	6.5	(0.6)
Local Roads	9.7	(0.9)	6.5	(0.6)	2.1	(0.2)
					(Residential areas only)	

The Contractor shall certify that the design of the installation has been done in accordance with "American Standard Practice for Roadway lighting," (D 12.1 - 1963) published by the Illuminating Engineering Society, 345, East 47th Street, New York, or in accordance with British Standard Code of practice CP 1004 of 1963 "Street lighting" Published by the British Standards Institution 2, Park Lane, London, W.I., except in so far as these have been varied by the provisions of this specification or any special provisions.

2.2 Wiring and Switching

The Wiring and switching supplied for control of lanterns (each device controlling a group of lanterns) shall be of a type approved by and agreed with the Electricity Supply Authority. Unless otherwise specified, photoelectric relay switching shall be used.

2.3 Columns and Brackets

a) Columns shall be of steel construction and shall consist of tapered round hollow shafts with anchor bases. Each column shall be provided with a suitable cable slot and a weatherproof service door fitted with a tamperproof lock. All locks shall be of the same pattern, and six keys shall be provided for them.

b) A non-hygroscopic mounting board composed of electrically insulating material shall be fitted in an easily accessible position inside the column, and shall be of suitable size to take all necessary electrical equipment. Adjacent to this mounting board, there shall be provided on the inside of the column two stainless steel studs, not less than 4 centimeters long nor less than 8 millimeters diameter and complete with stainless steel lock nuts and washers, for use as earthing connections.

c) Brackets to provide the required outreach shall be of sufficiently strong construction to support the lantern under all normal conditions without significant movement, and shall be provided with suitable fittings to take the lanterns. When in position, brackets shall be inclined upwards at an angle of approximately 15° to the horizontal, and shall be fixed to their supports by suitable welding, fastenings or wall plates.

d) Columns and brackets shall be structural steel having the following mechanical properties :

- Thickness of sheet steel (min)	4 mm.
- Ultimate Tensile Strength (min)	41 kg/mm ²
- Yield Point (min)	25 kg/mm ²
- Elongation (min)	21 %

e) Straightness. That part of the column above the ground shall not deviate from straightness by more than an amount calculated at a rate of 2.1 mm. per meter of column length;

2.4 High Mast Lighting

Mounting heights from 20 meters and more shall be High Mast.

a) Columns carrying high mast lighting shall be designed to permit the whole of the lantern carriage to be easily, safely and quickly lowered to ground level for maintenance works. The columns shall be designed in accordance with British Standard 449 or other internationally accepted standard for design of structural steelwork in buildings, except that the temporary horizontal deflection of the top of the column may to up to 7.5 % of the height above ground. In calculating the bending moment at ground level due to wind load, it shall be assumed that the wind speed at a point ten meters above ground level is 60 kilometers per hour, and the design of the column shall be such that wind excited oscillations are damped as much as possible. Adequate allowance shall be made for the stresses produced by such oscillations. Details shall be given of the vertical and horizontal load and the bending moment at the foundations.

b) The base plate shall be free from laminations and all dimensions of the base plate shall be provided, including details of the holding down bolts. A cable entry hole of not less than 30 centimeters diameter shall be provided centrally in each base plate, and the bottom of the mast shall pass through the base plate and be welded on both sides. An alternative construction of equal strength may be accepted by the Engineer, but a butt weld on the base plate will not be accepted.

Each holding down bolt shall be tensioned to the design value, and within the maintenance period, the bolts shall be checked and retightened as necessary, after which the nuts shall be repainted.

c) The columns shall be delivered to the site in the minimum practicable number of lengths. Any joints necessary shall be positioned as near the top of the columns as possible.

d) The lantern carriage shall support the designed number of lanterns without significant sway or movement, and shall be capable of supporting these lanterns and a cradle with two men for maintenance work. The lantern carriage shall be protected to prevent damage to the painted surface of the columns, rotation of the carriage during raising and lowering shall be prevented and correct location when raised shall be ensured by some positive means. It shall be possible to remove the lantern carriage without lowering the column.

e) The lantern carriage shall be raised and lowered by a self sustaining winch capable of being operated either by hand or by a portable electrically operated tool. It shall be possible to lock the winch in any position by a simple, robust and easily operated mechanism. The worm gear shall have a ratio of at least 20:1.

f) The winch shall have removable handles, and it shall be mounted within the base compartment at a convenient working height. The opening in the column shall be of sufficient size to allow proper operation and maintenance of the winch mechanism. A weatherproof label shall be fixed in an obvious position within the column base, giving a full list of all lubricating points on the winch and other mechanism, and detail of recommended lubricants. Winches fixed inside the column shall be provided with a substantial cover to fully protect them falling dirt and dust.

g) A sufficient number of turns of the hoisting cable shall be left on the winch drum when the carriage is fully lowered to ensure that the cable anchorage on the drum does not take the full load of the carriage at any time.

h) the last 30 centimeters of travel to the fully raised position of the carriage shall be by hand operation, and for this purpose either a limit switch shall be provided to cut off the power supply to the portable electric tool at the appropriate time, or else some form of indication shall be provided to indicate when the carriage is 30 centimeters from the fully raised position.

i) The winch cable shall be of stranded stainless steel wires and shall have sufficient capacity to carry safely the lantern carriage complete with lanterns and a cradle with two men attached thereto. Great care shall be taken during installation to ensure that the hoisting cables do not twist or kink, and any set twist or kink shall be sufficient reason for the rejection of that cable.

j) All parts of the raising and lowering mechanism which are inaccessible after erection of the columns shall be adequately protected against moisture, dirt and corrosion. Where necessary, pulleys shall be fitted with shields to prevent the winch cable becoming displaced. Pulleys for electrical cables shall be of sufficient diameter that the cable will not be bent to a smaller radius than that permitted by local regulations or those of the British Institution of Electrical Engineers, 14th Edition. Where necessary for continued trouble free operation, metal parts shall be of stainless steel or other approved non-corrodible material.

k) When power tool operation is used, a suitable power outlet shall be provided and the operator shall be adequately safeguarded against any electrical shocks. The power tool shall preferably be designed to work on a reduced voltage and in this case, a suitable approved type of transformer shall be provided. The power tool shall be designed so that continuous operation will cause no harmful effects on either the winch or the tool, and in the event of power failure the winch shall be self locking. Conversion from power to hand operation and vice versa shall be quick and easy and shall not require special tools. Full information on the type of power tool proposed shall be given with the tender.

2.5 Protection Against Corrosion

Unless otherwise specified, columns, bracket arms, and brackets shall be protected against corrosion either by painting or galvanizing as follows:

2.5.1 Painting.

a) Columns and masts shall be treated internally with hot asphalt under high pressure so as to give a complete and unbroken asphaltic covering or other approved anti-corrosion treatment shall be applied to give at least equally good protection. Bases shall be similarly treated up to a level of 25 centimeters above ground level.

b) Before delivery to the site, columns, masts, steel brackets, and external fitting shall have all external welds ground down and all external surfaces cleaned by shot blasting or other approved method to a white metal finish free of all signs of rust. Immediately following this treatment the items shall be painted with two coats of tropical red lead undercoat followed by two coats of aluminium paint or they shall be treated in a similar and not less effective manner acceptable to the Engineer to prevent subsequent corrosion. After erection, all imperfections and damage shall be made good to the Engineer's satisfaction and the items shall be given a final coat of all aluminium paint.

2.5.2 Galvanizing

a) Before delivery to the site, columns, masts, steel brackets, and external fittings shall have all external welds ground down. Poles and other ferous materials shall be galvanized both inside and outside by hot dipped in accordance with ASTM A 525-76. Weight of zinc coating shall not be less than 550 gram per square meter.

b) Base of columns, both inside and outside shall be coated with bituminous paint up to a level of 25 centimeters above the base plate.

3. Construction Methods

3.1 Excavation and Reinstatement

Excavation for cable or conduit laying or for foundations and reinstatement shall be carried out in accordance with the provisions of Section 2.5 (Sub-Clause 2.5.3.2) of these specifications. Reinstatement shall be such that the surface is restored to at least its original standard.

3.2 Concrete Work

All necessary foundations and footings or other concrete work shall be carried out in accordance with Sections 5.1 (sub-Clause 5.1.1.2) and 5.2 of these specifications. Unless otherwise specified on the Drawings or in the Special Provisions*, concrete shall be class 8. Foundations shall be placed in one operation except that the top 5 centimeters may be placed after the superimposed structure is in position. The exposed portions of foundations shall be formed to present a neat and tidy appearance and sloped to shed water away from the structure supported. Where existing obstructions prevent the construction of foundations as shown on the plans, then an effective alternative may be provided subject to the prior approval of the Engineer.

* Ministry of National Development, Department of Highways, Specification For Highway Construction, 1970, Bangkok, Thailand.

3.3 Conduits, fittings and boxes

Conduits, fittings and boxes shall be provided and installed in accordance with the provisions of Section 5.11 of these Specifications, except that chemically stable tough plastic conduits, fittings and boxes, according to samples previously approved by the Engineer, will be permitted providing that they do not soften when exposed to high ambient temperature.

The contractor may use a larger size of conduit than that specified, at no extra charge, if he wishes, but in this case the entire run shall be of the same size. No reducing couplings will be permitted.

When metal conduits are used, cuts shall be made square and true and all couplings shall be screwed up until the ends of the conduits are brought together in order to provide a good electrical contact throughout. The threads on all ferrous metal conduits shall be painted with rust preventing paint before couplings are made up. Where the coating on ferrous metal conduit has been damaged in handling, such damaged places shall be painted with rust preventing paint before installation.

All conduit ends shall be threaded and capped until wiring is started. When caps are removed, the threaded ends shall be provided with approved conduit bushings.

Conduits shall be laid to a depth of not less than 50 centimeters below paved footwalks and medians and not less than 75 centimeters below the roadway surface. The location of all conduits at curb lines shall be marked by means of a 'Y' at least 10 centimeters high incised in the face of the curb directly above the conduit. Conduit terminating in a standards, cabinets or pedestals shall extend at least 5 centimeters vertically above the bottom of the box. Such conduit shall be sloped towards the top of the box to facilitate pulling. Conduit entering the bottom of the box shall enter in the direction of the run.

3.4 Pull boxes or Junction Boxes.

Pull boxes shall be installed as shown on the plans and in any case at not more than 60 meters intervals. The contractor may install additional pull boxes without extra charge if he wishes. Pull boxes shall be of reinforced concrete not less than 10 centimeters thick and may be of approved pre-cast design. Reinforced concrete covers, secured by two recessed brass bolts shall be used on footwalks, the covers being inscribed 'Street Lighting' on the outside. Under the roadway, covers shall be of steel or cast iron, inscribed as specified above, and laid in a suitable concrete footing to withstand traffic loads. Metal covers shall be effectively earthed to an earthing rod inside the box. Tops of pull boxes shall be effectively level with the surrounding paved areas, whether footwalk or roadway, but in unpaved areas, the tops of pull boxes shall be buried 30 centimeters below ground level. The bottom of pull boxes shall be bedded in sand and cement or crushed rock. Permanent makers shall be provided and erected to show the position of all pull boxes.

3.5 Testing

A functional test shall be made on completion of the work in order to demonstrate that every part of the equipment and installation functions as intended and specified. This test shall consist of not less than five nights continuous and satisfactory operation. If any defects or unsatisfactory operation are revealed, this condition shall be corrected and the test continued until the required five nights of satisfactory operation have been performed.

Prior to the functional test, the contractor shall carry out the following tests to the entire satisfaction of the Engineer.

- 1) Each circuit shall be tested for continuity
- 2) Each circuit shall be tested for cathing

3) A 'megger' test shall be made between each circuit and earth. The insulation resistance shall be shown to be at least that specified within the relevant codes.

4) The distribution horizontal illumination value of specified spacing in each code item, in rate of lux measured between two luminaires every two meters along longitudinal and transverse road way line, are essentially measured to show max., mean, min. illumination and uniformity ratios.

Uniformity ratio	=	$\frac{\text{minimum illumination}}{\text{average illumination}}$
	=	not less than 1:2.5
and	=	$\frac{\text{maximum illumination}}{\text{minimum illumination}}$
	=	not more than 6:1

5) Rainproof Test.

The lantern under test shall be mounted in its normal orientation on an adjustable support as shown in fig. 1, so that the fitting is near the center of the arc described by the oscillating tube.

After being switched on for one hour the lantern shall be subjected to a spray of water at a temperature not exceeding 20° C and at a pressure of approximately 5.7 lbs/in² (0.4 kgs/cm²) the tube being oscillated so as to describe an angle of 60 degrees from the vertical and in both directions from it. This treatment shall be continued for 20 minutes, the fitting being switched off after 10 minutes.

At the end of this test, there shall be no damage to the lamp or enclosure and no visible evidence of water having accumulated in the fitting.

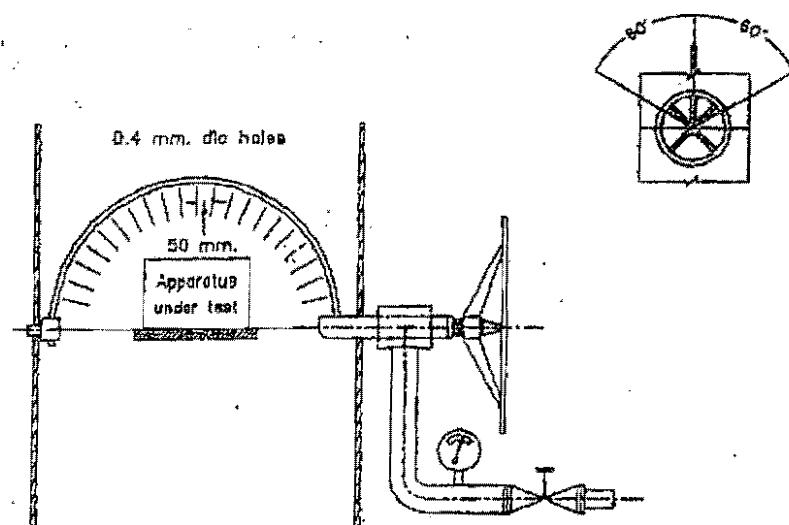


Fig.1 Apparatus for rainproof test

On the completion of testing, the contractor shall supply to the engineer three copies of 'as built' plans and circuit diagrams, which shall clearly indicate any modifications which have been made to the original design.

4. Measurement

4.1 Unless a Bill of quantities is provided this item will not be measured and payment shall be made one lumpsum basic

4.2 When a Bill of Quantities is provided measurements shall be made on the items detailed in the Bill of quantities completed, accepted and measured in place. The unit of measurement for each item shall be the unit of measurement shown in the Bill of Quantities.

5. Payment

5.1 The lump sum payment for the street lighting installation shall be full compensation for furnishing all materials, labour, equipment, tools, supervision, testing and incidentals necessary to complete the work, including any necessary backfill, foundations, restoration of footwalk, roadway, curbing and appurtenances damaged or destroyed during construction. The payment shall also cover the cost of design where this is called for.

The lump sum payment shall be deemed to include full compensation for all additional materials and work not shown on the Drawings or specified which are necessary to complete the installation.

5.2 The work measured as provided in 4.2 shall be paid at the contract unit price for each item, such price and payment constituting full compensation for all materials, labour, equipment, tools and incidentals needed to complete the work. All materials and work necessary for satisfactory completion of the installation which are not specifically mentioned in the Bill of quantities shall be deemed to be included in the items shown.

6. Information to be supplied by ^{Contractors} bidders

6.1 catalogs of electrical components; lanterns, ballast, etc.

6.2 Plans and circuit diagrams, ground rod connection diagram.

6.3 Photometric data

 6.3.1 Utilisation Curve

 6.3.2 Isocandela diagram

 6.3.3 Horizontal Isofootcandle diagram

 6.3.4 Polar light distribution curve

6.4 Details of columns., Brackets, Base Plates, concrete foundations.

7. Other details of steel columns not mentioned above should comply with British Standard 1840 : 1960. The decision shall be made by the Department.

การไฟฟ้าและวงจร

8. ข้อแนะนำในการติดตั้งอุปกรณ์ไฟฟ้าแสงสว่างสาธารณะ

ข้อแนะนำนี้ก่อสร้างดังนี้ การและคุณสมบัติของวัสดุที่เหมาะสมในการติดตั้งระบบไฟฟ้า แสงสว่างบนทางหลวงและถนนต่าง ๆ สะพานทุกชนิดและไฟสัญญาณจราจร และไฟสองฝ่าย ที่เป็นส่วนประภากันของทางหลวง และถนนทั้งหลาย ตั้งมีรายละเอียดดังไปนี้

1. ไฟฟ้าแสงสว่างบนทางหลวงและถนน หมายถึงไฟฟ้าแสงสว่างสาธารณะที่ติดตั้ง ให้ส้านรับสองฝ่ายแก่ทางหลวง และถนนทุกชนิดมีข้อแนะนำดังนี้

1.1 MAIN INCOMING SWITCH BOARD จะติดตั้งบนเสาไฟฟ้าได้เฉพาะเสาขนาด 12,10, 8.5 หรือ 6 เมตร เท่านั้น โดยต้องติดตั้งในตู้โดยน้ำหนักกรังไม่เกิน ความกว้างของหน้าเสา ความหนาไม่เกิน 10 เซนติเมตร มีความแข็งแรง ป้องกันและป้องกันน้ำเข้าได้โดยต้องติดตั้งไว้ด้านซ้ายเสานั้นตู้ไฟฟ้า ทางเดียวกับรถจักรยานยนต์ที่เดินปั่นติดประมาณ 1.70 - 2.00 เมตร หรือจะให้ SAFTY SWITCH ชนิดใช้งานมาย nok อย่างเป็น MAIN INCOMING SWITCH ก็ได้

1.2 จะต้องใช้ FUSE ชนิดทำงานล่า (TIME DELAY) ซึ่งมีความสามารถในการตัดไฟ (INTERRUPTING CAPACITY) ได้ไม่น้อยกว่า 10,000 AMPERES SYMMETRICAL และต้องมี AMPERE RATING ของ FUSE ที่ใช้ทุกกรณีไม่เกินขนาด AMPERE เครื่องจักร

1.3 หากติดตั้งเกินกว่า 1 วงจรruk วงจรย่อยต้องมีเครื่องป้องกันวงจรย่อย ซึ่งเป็น SAFTY SWITCH หรือ FUSE อย่างหนึ่งอย่างใด เป็นตัวคุม แต่ต้องมีขนาด AMPERE RATING ของ FUSE เหมาะสมกับ LOAD ของวงจรย่อยนั้น ๆ ตัวเน้นป้องกันวงจรย่อยดังกล่าว ควรติดตั้งไว้ต่างหากจากเสาที่ติดเครื่องจักร หรือในกรณีที่ถนนมีทางแยกกันนี้จะทำเป็น DISTRIBUTION BOARD ให้ในตู้โดยน้ำหนักมีความแข็งแรงป้องกันน้ำเข้าได้ ติดตั้งไว้ที่ทางกลางของถนน โดยหันฝาตู้ซึ่งเปิดได้ไปทางเดียวกับรถจักร

1.4 การเดินสายจากอุตสาหกรรมเครื่องวัด ถึง MAIN INCOMING SWITCH และ
ต่อไปถึง SAFETY SWITCH หรือ FUSE ของวงจรย่อยจะต้องใช้สายชนิดของวงจร
ไฟฟ้านครหลวงแบบ "C" หรือชนิด UNDERGROUND CABLE "NY" หรือชนิด อีน
ที่มีคุณสมบัติเท่าเทียมกันเท่านั้น โดยมีขนาดพื้นที่หน้าตัดเพียงพอที่จะรับ
กระแสไฟฟ้าได้เท่าขนาด AMPERE ของเครื่องวัดฯ แต่ต้องไม่ต่ำกว่า 4 ตาราง
มิลลิเมตร ทั้งนี้ โดยที่อตามตารางขนาดสายสำหรับเดินในท่อร้อยสายไฟฟ้า
(หน้า 4 ของการเดินสายการไฟฟ้านครหลวง) ที่ส่งมาด้วย และจะต้องร้อยในท่อ
ร้อยสายไฟชนิดโซน้ำข้าบสังกะสี (RIGID STEEL CONDUIT) เพื่อป้องกันการ
กรุขับกระแทกและช่วยรองรับความสั่นสะเทือนจากการจราจร และต้องต่อ
ปลายท่อให้สูงขึ้นไปตามตัวเส้นน้ำสูงระดับต่ำกว่าต่ำแห่ง CLEVIS หรือ
SECONDARY RACK ประมาณ 30 - 60 เซนติเมตร โดยจะต้องเหลือปลายสาย
ให้ประมาณ 1.60 เมตร และสามารถปิดปลายท่อด้วย SERVICE ENTRANCE CAP
เสมอไป

1.5 การเดินสายจาก SWITCH BOARD ไปยัง LOAD หากผู้ได้ดินจะต้องใช้สาย
ชนิดที่ระบุในข้อ 1.4 ส่วนที่ลอดได้ดินจะต้องร้อยในท่อร้อยสายไฟฟ้าชนิด
โซน้ำข้าบสังกะสีที่ระบุในข้อ 1.4 ทั้งนี้ ขนาดสายกับจะต้องเหมาะสมกัน
(สามารถดึงสายออกมาตรฐานซ่อมได้สะดวก) ส่วนที่วางใต้พื้นดินหรือบนดาด
เรือยท่อเช่นเดียวกัน หรือผูกในดินโดยตรงให้ลึกจากผิวดินไม่น้อยกว่า 80
เซนติเมตร โดยมี SLAB คอนกรีตวางป้องกันไว้เหนือกระดับสายโดยตลอด ขนาด
ของสายจะต้องเหมาะสมกับ LOAD ตามตารางขนาดสายที่ระบุในข้อ 1.4

1.6 การเดินสายภายในเสาเข็มไปยังดวงโคมจะต้องใช้สายชนิด STREET LIGHT
WIRE (TYPE RH) หรือใช้สายชนิดที่ระบุไว้ในข้อ 1.4 กีดี ทั้งนี้ใน 2 กรณี ต้องมี
ขนาดพื้นที่หน้าตัดของตัวนำไฟฟ้าทองแดงไม่เล็กกว่า 2 ตารางมิลลิเมตร
1.7 ดวงโคมแต่ละดวงต้องมี CARTRIDGE FUSE ป้องกันการลัดวงจรด้วย

- 1.8 การต่อแยกสายห้องจรมเนหรือห้องจ่ายความร้อนการต่อในตัวแห่งที่ผังอยู่
ให้พื้นดิน เป็นจากเป็นจุดอ่อนที่จะชำรุดได้ง่าย ผ่านการต่อแยกสายภายในเข้า
โคนะจะต้องไม่ต่อโดยใช้พันหรือปิดเกลี้ยงแล้วพันหัวร้อยต่อด้วยผ้าพันสาย และ
ให้ใช้ต่อแยกสายด้วย WIRE JOINT หรือเครื่องต่อสายชนิดพันหรือบีบแปลงตัวอย่าง
เครื่องมือกสและวานหันด้วยวัสดุที่เป็นสารประกอบสำนับหุ้มสาย
(INSULATING SEALING COMPOUND) และพันหัวด้วย TAPE ชนิดสำนับพัน
สายไฟฟ้าโดยเฉพาะทุก ๆ แห่ง
- 1.9 ขอให้ศึกษาระบบ การต่อสายลงดินโดยต้องต่อสายลงดินเข้ากับเปลือกนอกร่อง
อุปกรณ์ไฟฟ้าที่ทำด้วยโลหะทุกชนิด เช่น ห่อร้อนสายไฟ ส่วนที่สูงพันพื้นดิน ถ้า
กสต่องเหล็กที่ติดตั้งแผงสวิทช์ เสาและฐานโลหะ ฯลฯ ดังมีรายละเอียดดังนี้
- 1.9.1 ตัวสายดินจะต้องเป็นสายทองแดงมีพื้นที่หน้าตัดไม่ต่ำกว่า 16 ต.ร.ม.ม.
 - 1.9.2 GROUND ROD ต้องเป็นชนิดทองแดงหรือทองแดงหุ้มมิครอน (COPPER CLAD) โดยต้องมีเส้นผ่าศูนย์กลางไม่น้อยกว่า $\frac{5}{8}$ นิ้ว และยาวไม่น้อยกว่า
กว่า 6 ฟุต หรืออาจใช้ชนิดทำด้วยเหล็กอบสังกะสี (HOT-DIP GALVANIZED STEEL) ก็ได้ แต่จะต้องมีเส้นผ่าศูนย์กลางไม่น้อยกว่า $\frac{5}{8}$
นิ้ว และยาวไม่น้อยกว่า 8 ฟุต
 - 1.9.3 การต่อให้ใช้วิธีเชื่อมสายลงดินกับ GROUND ROD หรือยึดด้วย
GROUND RODCLAMP หรือใช้อุปกรณ์สำนับการต่อสายดินโดยเฉพาะ
 - 1.9.4 การติดตั้งสายลงดินห้องชุดจะต้องให้รัดกุมและมีคีด โดยเฉพาะอย่างยิ่ง
ให้ฝังปลายบนของ GROUND ROD จนลงในดินลึกจากระดับผิวดิน 30
เซนติเมตร เพื่อให้มีความมั่นคงและยกหัวจะถูกใจภาระ
 - 1.9.5 การต่อลงดินหากใช้ระบบสายดินร่วมกัน สายดินร่วมจะต้องต่อลงดินไป
น้อยกว่า 2 จุด
- 1.10 จะต้องออกแบบและตรวจสอบให้มี VOLTAGE DROP ระหว่าง MAIN INCOMING
SWITCH BOARD กับจุดใด ๆ ในวงจรไม่เกิน 2% เมื่อเปิดไฟทุกดวง

- 1.11 กรณทางหลวงจะต้องมีแบบแผนแสดงถนน หรือบริเวณที่จะใช้กระไฟฟ้า
ส่องสว่างทั้งหมด โดยมีแบบและรายละเอียดแสดงลักษณะถนน เกาะต่าง ๆ
ชนิดและขนาดของเสาดวงโคม สายไฟฟ้า ชีวส์ ระบบสายลงดิน และห่อร้อย
สายตลอดจนการแบ่งวงจรรายละเอียดของโคมไฟฟ้า และอุปกรณ์ และ
SINGLE LINE DIAGRAM ให้การไฟฟ้านครหลวงตรวจสอบการติดตั้งอุปกรณ์และระบบระบบทะไฟฟ้า
- ขอให้การไฟฟ้านครหลวงตรวจสอบการติดตั้งอุปกรณ์และระบบระบบทะไฟฟ้า
- 1.12 การไฟฟ้านครหลวง จะดำเนินการตรวจการติดตั้งอุปกรณ์และสายไฟฟ้าที่กรม
ทางหลวงดำเนินการของก่อนบรรจุภาระไฟฟ้า ทั้งนี้นับถ้วนจากการไฟฟ้านคร
หลวง ได้รับเงินค่าติดตั้งเครื่องวัดฯ ค่าตรวจสอบฯ หรือค่าใช้จ่ายอื่น ๆ และ
ดวงโคมตัวอย่าง (เฉพาะชนิดที่ต้องมี BALLAST) ชนิดละ 1 ดวง จาก
กรณทางหลวงแล้วจะดำเนินการทดสอบดังนี้
- 1.12.1 ทดสอบค่ากำลังไฟฟ้า POWER FACTOR ความต้านทานของอนุรุ่น
หุ้มสายในดวงโคม ความแข็งแรงและสะ不死ในการบำรุงรักษา ลักษณะ
การป้องกันผุนผงและแมลงเข้าไปภายในดวงโคม และลักษณะการ
กระจายแสง โดยสังเกตหั้งนี้ ดวงโคมจะผ่านการทดสอบได้เมื่อมีอัตราค่า
กำลังไฟฟ้าไม่เกินพิกัดของกำลังไฟฟ้าตามตารางที่แนบ POWER
FACTOR ไม่ต่ำกว่า 0.9 LAG. และ ความต้านทานของอนุรุ่นหุ้มสายใน
ดวงโคมไม่ต่ำ กว่า 0.5 MEG.OHM.
- 1.12.2 ทดสอบค่าความต้านทานของสายแต่ละวงจร ระหว่างคู่สายและสาย
ไฟฟ้าแต่ละ เส้นกับดิน ต้องมีค่าไม่ต่ำกว่า 0.5 MEG. OHM.
- 1.12.3 ทดสอบค่า GROUND RESTSTANCE ของการต่อลงดิน แต่ละจุดจะต้อง
มีค่าสูงสุดไม่เกิน 25 OHM

2. ไฟฟ้าส่องสว่างที่ติดตั้งบนสะพาน หมายถึงไฟฟ้าแสงสว่างสาธารณะที่ติดตั้งไว้สำหรับส่องสว่างบนสะพานรถยนต์ และสะพานคนเดินเท้าทุกชนิด มีข้อแนะนำดังนี้

2.1 MAIN INCOMING SWITCH BOARD ให้เป็นไปตามรายละเอียดที่ระบุไว้ใน

ข้อ 1.1 หรือหากติดตั้งที่ด้านสะพานก็ให้อยู่ในตำแหน่งที่สะดวกในการตรวจ
สอบแก้ไขบำรุงรักษา

2.2 จะต้องใช้ FUSE ตามรายละเอียดที่ระบุในข้อ 1.2

2.3 หากติดตั้งเกินกว่า 1 วงจร ให้เป็นไปตามรายละเอียดที่ระบุไว้ในข้อ 1.3

2.4 การเดินสายจากจุดที่จะติดตั้งเครื่องวัดฯ ซึ่ง MAIN INCOMING SWITCH และ
ต่อไปถึง SAFTY SWITCH หรือ FUSE ของวงจรป้อง หากเป็นสายใต้ดิน หรือ
เดินทางไปรับโครงสร้างสะพาน ให้เป็นไปตามรายละเอียดที่ระบุไว้ในข้อ 1.4
แต่หากเป็นสายที่เดินไปในอาคารซึ่งภายนอกสะพานจะต้องใช้สายชนิดของ
การไฟฟ้านครหลวง แบบ 'A' หรือชนิด TW พื้นที่น้ำตื้นเพียงพอที่จะรับกระเบ
ไฟฟ้าได้เท่านานาด AMPERE ของเครื่องวัดฯ หั้งนี้ พื้นที่น้ำตื้นต้องไม่น้อยกว่า
4 ตารางมิลลิเมตร และจะต้องเดินสายไปทางกับเสาที่จะติดเครื่องวัดฯ ซึ่งจะ
ต้องเป็นเสาขนาด 12 เมตร 10 เมตร 8.5 เมตร หรือ 6 เมตรเท่านั้น จับยึดด้วย
CLEVIS ในตำแหน่งที่ต่างกว่า SECONDARY RACK ของการไฟฟ้านครหลวง
30 - 60 เซ้นติเมตร โดยจะต้องเหลือปลายสายไว้ประมาณ 1.50 เมตร ส่วนการ
เดินสายส่วนที่อยู่ภายใต้สะพานจะต้องใช้สายชนิดของการไฟฟ้านครหลวงแบบ
'C' หรือชนิดอื่นที่มีคุณสมบัติเท่าเทียมกัน เดินในท่อร้อยสายไฟฟ้าชนิดเหล็กขอ
สังกะสี (RIGID STEEL CONDUIT) ปลายท่อต้านอยู่ภายนอกสะพานตรงจุดที่จะ
ต่อ กับสายที่เดินในอาคารจะต้องครอบด้วย ENTRANCE CAP

2.5 การเดินสายจาก SWITCH BOARD ไปยัง LOAD จะต้องเป็นไปตามราย
ละเอียดในข้อ 1.5 หั้งนี้ รวมถึงสายที่เดินบนตัวสะพานด้วย

2.6 การเดินสายภายในเสาขึ้นไปยังดวงโคมที่ติดตั้งกลางแจ้งให้เป็นไปตามราย
ละเอียดในข้อ 1.6

- 2.7 ดวงคอมม์ที่ติดตั้งก่อนแจ้งแต่ล่วงจะต้องมี CARTRIDGE FUSE เช่นเดียวกับ
ข้อ 1.7 ผู้วอนคอมม์ที่ติดในร่ม เช่น ได็นสังคากะลพานโดยคนเดินเข้ามอญนให้ใช้
ไม่เกิน 10 ดวง ต่อ 1 วงจร โดยมี CARTRIDGE FUSE หรือ CIRCUIT BREAKER
ควบคุมวงจรในห้องของเดียวกัน

2.8 การต่อแยกสายหัวงวงจรเมน หรือหัวจ่ายอย่างให้ปฏิบัติเช่นเดียวกับข้อ 1.8 ผู้วอน
ในช่วงที่อยู่หนึ่งเดือน หรือที่เหมาะสมไปตามโครงสร้างของสะพาน จะต้องต่อในส่วน
โคนะอ่อนสังกะสี (CONNECTION BOX) ชนิดป้องกันน้ำเข้าได้เท่านั้น โดยให้ใช้
ต่อแยกสายด้วย WIRE JOINT หรือเครื่องต่อสายชนิดขัน หรือบีบแป่นด้วย
เครื่องมือกอก แล้วพันทับด้วยวัสดุที่เป็นสารประกอบสำหรับรูมสาย
(INSULATING SEALING COMPOUND) และพันทับด้วย TAPE ชนิดสำหรับพัน
สายไฟฟ้าโดยเฉพาะทุก ๆ แห่ง และห่อร้อยสายไฟฟ้าช่วงที่ยึดติดกับโครงสร้าง
ของสะพานจะต้องบันยิดด้วย RIGID CLAMP และ RIGID CLAMP BACK และ
ยึดกับโครงสร้างสะพานด้วยพูก็โคนะ (EXPANSION BOLT) สำหรับสะพาน
คงทนกรีดหรือใช้ BOLT AND NUT พร้อมแหวนกันคลายสำหรับสะพานเหล็ก
โดยให้จุดที่บันยิดแต่ละจุดมีระยะห่างกันไม่เกินครึ่ง 50 เซนติเมตร

2.9 ขอให้จัดทำระบบการต่อสายลงตินให้เป็นไปตามรายละเอียดที่ระบุไว้ในข้อ
1.9, 1.9.1, 1.9.2, 1.9.3, 1.9.4 และ 1.9.5

2.10 VOLTAGE DROP ให้เป็นไปตามรายละเอียดที่ระบุไว้ในข้อ 1.10

2.11 กรรมทางหลวงจะต้องมอบแบบไฟสะพานโดยมีรายละเอียดตามที่ระบุไว้ในข้อ
1.11 ให้การไฟฟ้านครหลวงใช้ประกอบการระหว่างครอบด้วย

1.12 การไฟฟ้านครหลวงจะดำเนินการตรวจสอบตามรายละเอียดที่ระบุไว้ในข้อ
1.12, 1.12.1, 1.12.2 และ 1.12.3

3. ไฟสัญญาณการจราจร ไฟกระพริบ และไฟส่องป้าย หมายถึง ระบบไฟฟ้าแสง
ส่องที่ติดตั้งเพื่อความมุ่งหมายในการควบคุมการจราจรของยานพาหนะต่าง ๆ ตามทางร่วม
ทางแยกหรือเพื่อเป็นสัญญาณให้ระวังอันตรายหรือกันทางคนเดินเข้ามอญนที่อยู่ด้านไฟฟ้าแสง
ส่องสำหรับส่องป้ายบอกเส้นทางต่าง ๆ มีข้อแนะนำดังนี้

- 3.1 MAIN INCOMING SWITCH BOARD ให้เป็นไปตามรายละเอียดที่ระบุในข้อ 1.1
- 3.2 การใช้ FUSE ให้เป็นไปตามรายละเอียดที่ระบุในข้อ 1.2
- 3.3 หากติดตั้งเกินกว่า 1 วงจร ให้เป็นไปตามรายละเอียดที่ระบุไว้ในข้อ 1.3
- 3.4 การเดินสายจากจุดที่จะติดตั้งเครื่องวัดฯ ถึง MAIN INCOMING SWITCH และต่อไปถึง SAFETY SWITCH หรือ FUSE ของวงจรอย่างใดก็ได้ ทุกจุด ให้เป็นไปตามรายละเอียดที่ระบุในข้อ 2.4
- 3.5 การเดินสายจาก MAIN INCOMING SWITCH BOARD ไปยัง LOAD หากมีได้ตินให้เป็นไปตามรายละเอียดที่ระบุไว้ในข้อ 1.5
- 3.6 การเดินสายภายในเสาโคมซึ่งเป็นโลหะให้เป็นไปตามรายละเอียดที่ระบุไว้ในข้อ 1.6
- 3.7. วงจรที่ควบคุมแต่ละ PHASE ของกราวาร์ต์คลาวด์ต้องมี CARTRIDGE FUSE ป้องกัน การสัตว์จะด้วย
- 3.8 การต่อสายแยกห้องห้องเมนหรือห้องจ่ายโดยให้เป็นตามรายละเอียดที่ระบุไว้ในข้อ 1.8
- 3.9 ขอให้จัดทำระบบการต่อลงดินเป็นไปตามรายละเอียดที่ระบุไว้ในข้อ 1.9, 1.9.1, 1.9.2, 1.9.3, 1.9.4 และ 1.9.5
- 3.10 VOLTAGE DROP เป็นไปตามรายละเอียดที่ระบุในข้อ 1.10
- 3.11 กรณทางหลวงจะต้องมอนแบบไฟสัญญาณการจราจรไฟกระพริบและไฟส่องป้าย โดยมีรายละเอียดตามที่ระบุในข้อ 1.11 ให้การไฟฟ้านครหลวงใช้ประกอบการตรวจสอบบันทึกการจราจรไฟฟ้า
- 3.12 การไฟฟ้านครหลวงจะดำเนินการตรวจสอบตามรายละเอียดที่ระบุไว้ในข้อ 1.12, 1.12.1, 1.12.2 และ 1.12.3

ตารางที่ 1. จำนวนกระแสสูงสุดที่ยอมให้ใช้ได้กับสายไฟฟ้าขนาดต่างๆ

ขนาดเนื้อที่หน้าด้ด เมตรสี่เหลี่ยม	กระแสสูงสุดสำหรับสายหุ้มเดินใน อากาศและบนอุกอาจา (Free air) แอมป์	กระแสสูงสุดสำหรับสายหุ้มเดินใน ห้องรีบภายในอากาศ แอมป์
0.5	-	3
1.0	10	6
1.5	13	8
2.5	18	12
4	27	16
6	36	22
10	50	30
16	76	50
25	96	64
35	119	79
50	150	102
70	188	121
95	231	160
120	268	170

กำหนดให้ตั้งแต่วันที่ 15 ตุลาคม 2508

คัดลอกจากกฎการเดินสายไฟฟ้านครหลวง หน้า 4

ตารางกำหนดพิกัดของกำลังไฟฟ้าสำหรับทดสอบความไฟฟ้าสายราชนาดีต่างๆ

ความคอมที่ใช้ทดสอบ Ic และ Mx. ใช้กำลังไฟฟ้าไม่เกิน	ขนาด	Watt. ของทดสอบ
Na. 85 W.	"	108 Watt.
135 W.	"	176 Watt.
140 W.	"	172 Watt.
180 W.	"	220 Watt.
N.P.Na. 250 W.	"	288 Watt.
400 W.	"	466 Watt.
Fl. 32 W.	"	46 Watt.
40 W.	"	48 Watt.
65 W.	"	80 Watt.
Hg. 80 W.	"	90 Watt.
125 W.	"	130 Watt.
250 W.	"	266 Watt.
400 W.	"	422 Watt.
1,000 W.	"	1,043 Watt.

9. ความรับมือของผู้รับจ้างต่อสาธารณูปโภค

เพื่อให้การก่อสร้างแล้วเสร็จสมบูรณ์และมิให้เกิดความเสียหายต่อทางราชการ ผู้รับจ้างจะต้องสำรวจที่ที่จะทำการก่อสร้างหาข้อมูลเกี่ยวกับสาธารณูปโภคต่างๆ และจะต้องรับผิดชอบในความเสียหายใดๆ ที่อาจจะเกิดขึ้นแก่สิ่งสาธารณูปโภคเหล่านั้น และถ้าปรากฏว่ามีสิ่งสาธารณูปโภคต่างๆ กีดขวางการก่อสร้างให้เป็นหน้าที่ของผู้รับจ้างที่จะดำเนินการตัดต่อภัยงานต่างๆ เพื่อการรื้อถอนเคลื่อนย้าย และซ่อมแซมหรือก่อสร้างให้กลับสู่สภาพเดิม ค่าใช้จ่ายในการดำเนินการทั้งหมดเป็นของผู้รับจ้างแต่เพียงผู้เดียว

10. ความรับผิดชอบของผู้รับจ้างในช่วงการนำร่องรักษา (เพิ่มเติมข้อ 1.4)

นับตั้งแต่วันที่คณะกรรมการตรวจสอบติดตั้งไฟฟ้าแสงส่องสว่างด้วยเครื่องเรียบ ร้อยละห้าเป็นต้นไป ผู้รับจ้างต้องรับประกันคุณภาพของหลอดไฟฟ้ามีกำหนด 24 เดือน และ ถูกประเมินที่ใช้ในการติดตั้งอีน ๆ ทั้งหมดที่เหลือมีกำหนด 36 เดือน และภายในระยะเวลาแห่ง การรับประกันนี้ รักษาภาระว่าหลอดไฟฟ้าและส่วนติดตั้งอีน ๆ เสื่อมคุณภาพลง ผู้รับจ้างจะ ต้องเปลี่ยนซ่อมแซมให้เรียบร้อยดื่นสุสภาพเดิมกماในเวลา 24 ชั่วโมงนับตั้งแต่วางที่ได้รับแจ้ง จากราชการทางหลวง ค่าใช้จ่ายในการดำเนินการทั้งหมดเป็นของผู้รับจ้างแต่เพียงผู้เดียว.